


RoofBlue Stormwater Detention System Designed For Use with the LiveRoof Green Roof System

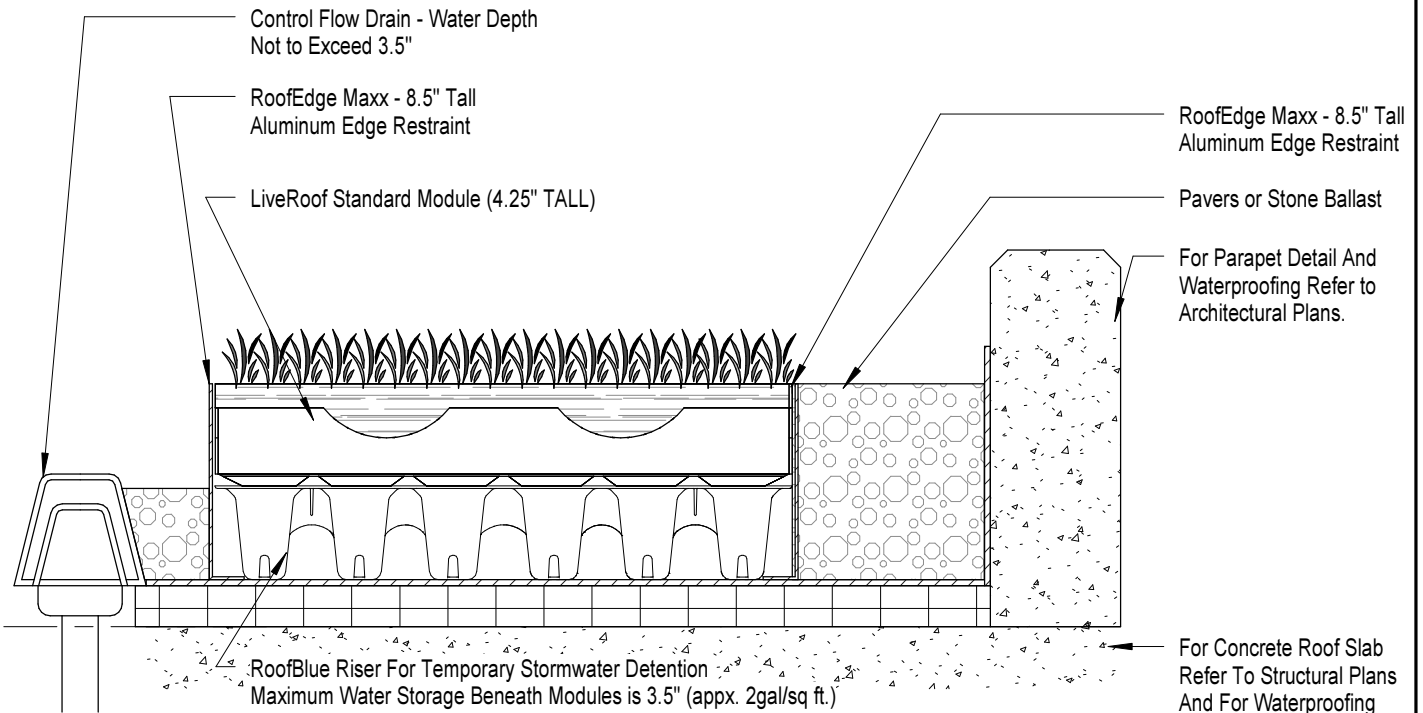

NOTES:

It is critical to account for the maximum detained water weight of a blue roof solution. LiveRoof Global, LLC advises to consult a structural engineer to determine safety of a blue roof solution for a particular building, to consult the waterproofing membrane manufacturer for compatible roof systems for blue applications, and to consult drain manufacturers for compatible control-flow drain options and data. LiveRoof Global advises against detaining water on the roof for a period longer than 24 hours. LiveRoof Global makes no statements as to the suitability of RoofBlue for any building or membrane assembly and accepts no liability for the weight, watertightness and flow rates of blue roof designs.

BLUE-A
v05.2014

ILLUSTRATIONS ARE TO CONCEPTUALLY ASSIST PROFESSIONALS IN DESIGNING LIVEROOF INSTALLATIONS. LIVEROOF DOES NOT ACCEPT RESPONSIBILITY FOR ENGINEERING BASED ON ILLUSTRATIONS. A QUALIFIED ROOFING SPECIALIST SHOULD BE CONSULTED TO DETERMINE APPROPRIATE WATERPROOFING AND ROOF DECK MATERIALS AND SUITABLE DESIGN.